

What is a Low Pressure BSP Fitting?

BSP fittings are a family of fittings used to connect up threaded pipe and equipment.

They are manufactured from pipe, bar, hollow bar, castings or forgings.

The pipe to be threaded must have a wall thickness of Schedule 40S minimum.

The fittings are used in non-critical, low pressure applications where welding is not possible or required. They therefore provide a relatively low cost method of connection.

BSP fittings are usually fitted with a sealant (paste or tape such as PTFE) and are considered to be permanent pipe-work.

Low Pressure BSP Fittings are rated at 150lb and are made to wrought iron specification BS1740. BSP fittings are made only in type 316.

They are provided with a Certificate of Conformity only, and not a full Test Certificate.

Sizes ½ to 3 inch are the most commonly used and thus the most readily available.

What is the thread form? - External MALE threads are tapered and Internal FEMALE threads are parallel. The threads are cut to BS21: Part 1: 1985 and are called Whitworth Threads. See last page below.

CONTACT

Address:	Unit 8, Petre Court Clayton Le Moors Accrington Lancashire BB5 5HY
Tel:	+44 (0)1254 775133
Web:	https://www.stainlessmetricstock.com/

REVISION HISTORY

Datasheet Updated	18 July 2019
--------------------------	--------------

DISCLAIMER

This Data is indicative only and as such is not to be relied upon in place of the full specification. In particular, mechanical property requirements vary widely with temper, product and product dimensions. All information is based on our present knowledge and is given in good faith. No liability will be accepted by the Company in respect of any action taken by any third party in reliance thereon.

Please note that the 'Datasheet Update' date shown above is no guarantee of accuracy or whether the datasheet is up to date.

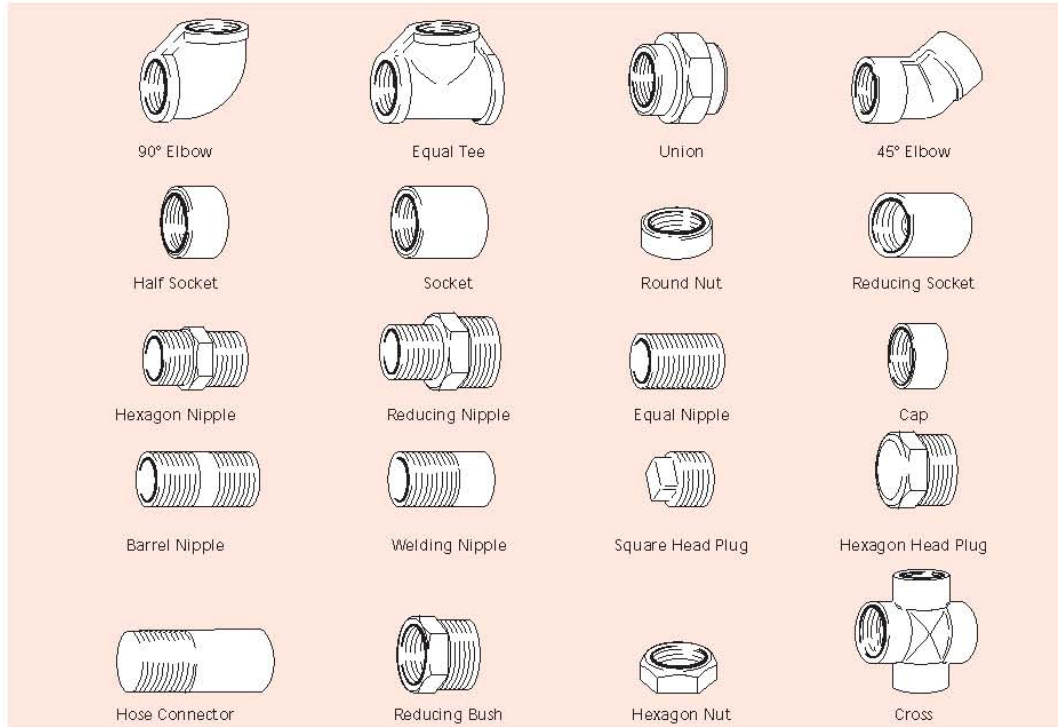
The information provided in this datasheet has been drawn from various recognised sources, including EN Standards, recognised industry references (printed & online) and manufacturers' data. No guarantee is given that the information is from the latest issue of those sources or about the accuracy of those sources.

Material supplied by the Company may vary significantly from this data, but will conform to all relevant and applicable standards.

As the products detailed may be used for a wide variety of purposes and as the Company has no control over their use; the Company specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied.

Advice given by the Company to any third party is given for that party's assistance only and without liability on the part of the Company. All transactions are subject to the Company's current Conditions of Sale. The extent of the Company's liabilities to any customer is clearly set out in those Conditions; a copy of which is available on request.






Whitworth Threads/British Standard Pipe Thread













- BSP fittings are a family of fittings used to connect up threaded pipe and equipment.
- They are manufactured from pipe, bar, hollow bar, castings or forgings.
- The pipe to be threaded must have a wall thickness of Schedule 40S minimum.
- The fittings are used in non-critical, low pressure applications where welding is not possible or required. They therefore provide a relatively low cost method of connection.
- BSP fittings are usually fitted with a sealant (paste or tape such as PTFE) and are considered to be permanent pipe-work.
- Low Pressure BSP Fittings are rated at 150lb and are made to wrought iron specification BS 1740.
- BSP fittings are made only in type 316.
- They are provided with a Certificate of Conformity only, and not a full Test Certificate.
- Sizes 1/8 to 3 inch are the most commonly used and thus the most readily available.
- External MALE threads are tapered and Internal FEMALE threads are parallel. The threads are cut to BS21: Part 1: 1985 and are called Whitworth Threads – See below.



Nominal size of outlet		Min O/D	Min O/D of body behind external thread	Min I/D of body behind internal thread	No. of threads per inch
in	mm	mm	mm	mm	
1/8	6	15.0	9.8	8.6	28
–	8	18.5	13.3	11.4	19
3/8	10	22.0	16.8	15.0	19
–	15	27.0	21.1	18.6	14
–	20	32.5	26.6	24.1	14
1	25	39.5	33.4	30.3	11
1	32	49.0	42.1	39.0	11
1	40	56.0	48.0	44.8	11
2	50	68.0	59.8	56.7	11
2	65	84.0	75.4	72.2	11
3	80	98.0	88.1	84.9	11
4	100	124.0	113.3	110.1	11
5	125	151.0	138.7	135.5	11
6	150	178.0	164.1	160.9	11

For what is each fitting used?

Fitting	Use / Notes
 90° Elbow	Enables the pipe run to be turned through a right angle. Female thread both ends
 45° Elbow	Enables the pipe run to be turned through 45 degrees. Female thread both ends
 Equal Tee	Allows the connection of a branch at right angles from the main pipe run. Female thread at all three connections.
 Socket	Used to connect two pipes or fittings that have male threads. Female thread both ends.
 Half Socket	Used to connect two pipes or fittings that have male threads. Used when there is a confined space Female thread both ends.

Fitting	Use / Notes
 Reducing Socket	Used to connect two different sizes of pipe or fittings that have male threads. Female threads both ends
 Cap	Used to terminate a male threaded pipe run. Female threaded.
 Union	Connects male threaded pipe or components. Used when easy or regular access is required e.g. for cleaning. Female thread both ends.
 Hexagon Nut	Used to fix male threaded fittings. Female threaded.
 Reducing Bush	Connects a larger female threaded component to a smaller male threaded component. Male thread at large end and Female thread at small end.

Fitting	Use / Notes
 Hexagon Nipple	Used to connect two female threaded components. Male thread both ends.
 Reducing Nipple	Connects two female threaded components of different sizes. Male thread both ends.
 Barrel Nipple	Used to connect two female threaded components of the same size. Male (taper) thread both ends.
 Equal Nipple	The only BSP fitting to have a <u>Male Parallel</u> thread. Used to connect female threaded components together
 Welding Nipple	Weld prepared at one end and Male thread at the other. Used to weld onto equipment that is to be connected to a female threaded component.

Fitting	Use / Notes
Close Taper Nipple	Used to connect two female threaded components. No land between the threads so shorter than a barrel nipple and thus used where space is restricted. Male thread both ends.
 Hexagon Head Plug	Used to blank off female threaded outlet. Cannot be used to blank off a pipe directly as pipes only have male threads. Male threaded.
 Square Head Plug	Used to blank off female threaded outlet. Cannot be used to blank off a pipe directly as pipes only have male threads. Male threaded.
90 Degree Bend	This has a larger radius than a 90 Degree Elbow and is again used to turn the pipe run through a right angle. Female thread both ends.
Hose Nipple	Used to connect a hose to the system. Male thread one end and hose serrations at the other.

Whitworth Threads / British Standard Pipe Thread

Nominal size of outlet		Min O/D	Min O/D of body behind external thread	Min I/D of body behind internal thread	No. of threads per inch
in	mm	mm	mm	mm	
1/8	6	15.0	9.8	8.6	28
1/4	8	18.5	13.3	11.4	19
3/8	10	22.0	16.8	15.0	19
1/2	15	27.0	21.1	18.6	14
3/4	20	32.5	26.6	24.1	14
1	25	39.5	33.4	30.3	11
1 1/4	32	49.0	42.1	39.0	11
1 1/2	40	56.0	48.0	44.8	11
2	50	68.0	59.8	56.7	11
2 1/2	65	84.0	75.4	72.2	11
3	80	98.0	88.1	84.9	11
4	100	124.0	113.3	110.1	11
5	125	151.0	138.7	135.5	11
6	150	178.0	164.1	160.9	11